




PHOTOPERIOD

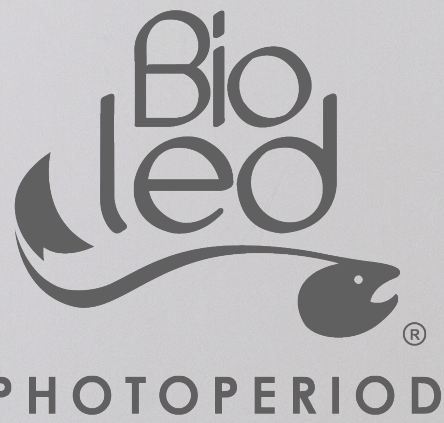

It is recommended for the growth phase, in large volume tanks, sea cages and units with high turbidity. The combination of white and green lights increases the area of light influence and **homogenizes the espectral irradiance in the water column**. Delivering the **right spectral stimulus in the fish to enhance growth and inhibit early maturity**.

Mix

650W

- On-growing
- Inhibition of early maturity in critical risk groups.
- **Wavelength:** Green 520nm and White 400 – 780nm
- **Work voltage :** 58 VDC
- **Gross weight :** 23kg (with cable)

Code: TPLmix 650W / CE



ELECTRICAL SPECIFICATIONS

Driver input	100- 240 VAC UNIVERSAL
Power	650W
Driver Protections	Overload, overvoltage, overtemperature and short circuit.
Input isolation/ driver output	IN/OUT, IN-GND, OUT-GND 100MΩ /500VDC /25°C / 70%RH CLASE I Type "HL"
LED light protection class	SELV – Class III
Input voltage	58 VDC
Wavelength	Green 520nm and White 400 – 780nm

PHYSICAL CHARACTERISTICS

Body	Stainless Steel 316 and High Density Polyethylene (HDPE)
Optic	Borosilicate (Explosion-proof – IEC 600/79)
Cable	50m Certified Submersible AD8, CE, HAR, etc.
Seals	Nitrile O'ring
Mounting	On the body, by means of 18mm ring, without protruding bolts.
Protection grade	IP X8
Lamp net weight	10 kg
Gross weigh	23kg (with cable)
Height	220mm (without handle) 308mm (with handle)
Diameter	299mm
Package size	High: 450mm x Ø: 360mm

SPECTRUM

